



COOLAG.

TILE BACKER CEMENT BOARD



WATER RESISTANT

Will not deteriorate when subjected to water or moisture



MOULD RESISTANT

Is resilient to mould growth



SOUND ABSORPTION

Excellent sound dampening



LIGHTWEIGHT AND EASY TO USE

Cement particle board makes handling easy



SCORE & SNAP CUTTING METHOD

No special tools required



COOLAG.

TILE BACKER CEMENT BOARD

COOLAG TILE BACKER CEMENT BOARD IS THE BEST POSSIBLE SURFACE TO TILE ONTO, PERFECT FOR BATHROOMS AND WET ROOMS.

- ✓ Mould & rot resistant
- ✓ Heat resistant
- ✓ Easy to cut & install
- ✓ Water resistant
- ✓ Lightweight
- ✓ Stable layer for tiling



Instructions for use



Key

1. Timber stud wall
2. Masonry wall
3. Timber floor
4. Concrete floor
5. Coolag tile backer
6. Tile adhesive
7. Wall tiles
8. Floor tiles



Floors

6mm should be used over structurally sound existing timber floors and should be screwed at 250mm centres (more if there is movement in the substrate).

Tile backer should be fixed with the rough face upwards. A good quality tile adhesive should be applied by notched trowel. The thicker the tile the deeper the notch is required, follow adhesive manufacturers instructions.

Tiles should be placed whilst the adhesive is still wet so don't overspread as placing tiles late can cause failures.

Walls

Wall tiling should always be carried out on 12mm on wall situations as often there is considerable weight.

The 12mm tile backer should be fitted rough side toward you.

The board should be fixed directly to the studs at 400mm centres with minimum 45mm screws at 150mm centres.

Tile backer handling

Tile backer is easy to work with and can be scored and snapped for ease of use. Tile backer can also be cut by saw and standard dust mask precautions should be taken.

Frequently asked questions

Can I fix through Coolag tile backer?

Yes, all fixings should be made directly into studs or noggins fixed firmly between the studs.

Which side should be tiled on?


Coolag tile backer should be fixed with the rough side facing the inside of the room.

Can I use Coolag tile backer in conjunction with underfloor heating?

Yes, it is suitable for under floor heating. Boards should always be placed below the heating element.

Can I fix through Coolag tile backer?

Use galvanised, self drilling, self counter-sinking screws. For 6mm use 25mm screws, and 45mm screws on 12mm Coolag tile backer.

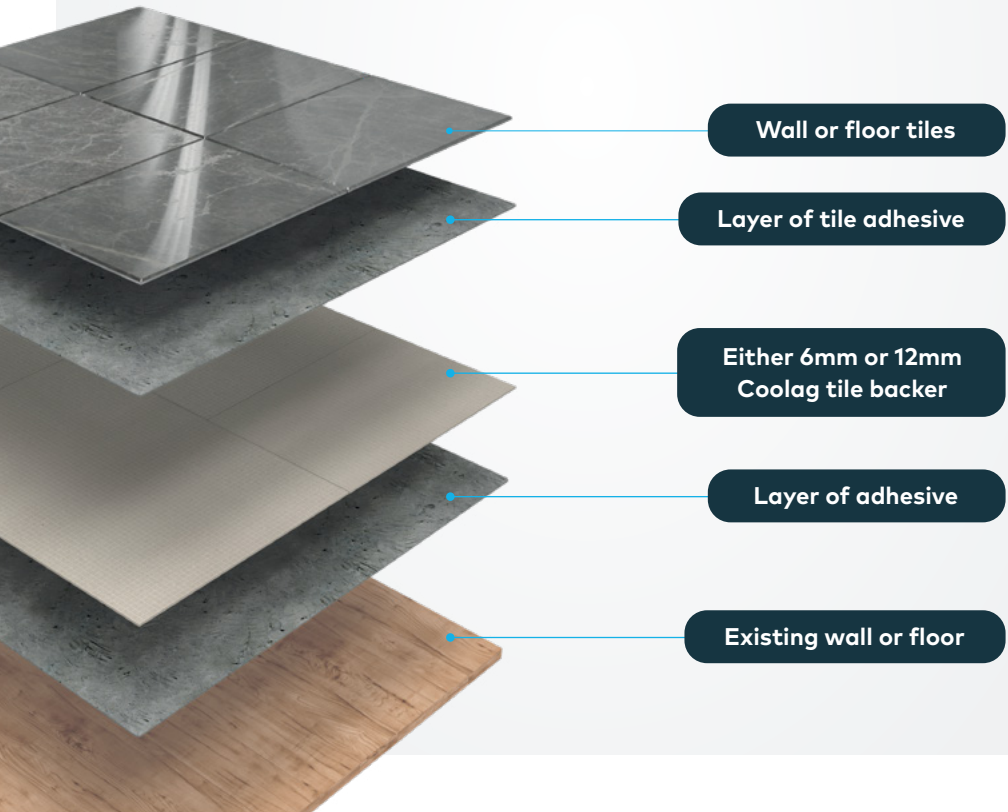



COOLAG.

TILE BACKER CEMENT BOARD

Industry websites

Tile Association

www.tiles.org.uk

Ceramic Tiling

www.cta-tiling.co.uk

Ardex adhesives

www.ardex.co.uk

Bal Adhesives

www.bal-adhesives.com

Homelux Trims

www.homelux.co.uk


Mapei

www.mapei.com

building products
ipp

COOLAG.

TILE BACKER CEMENT BOARD

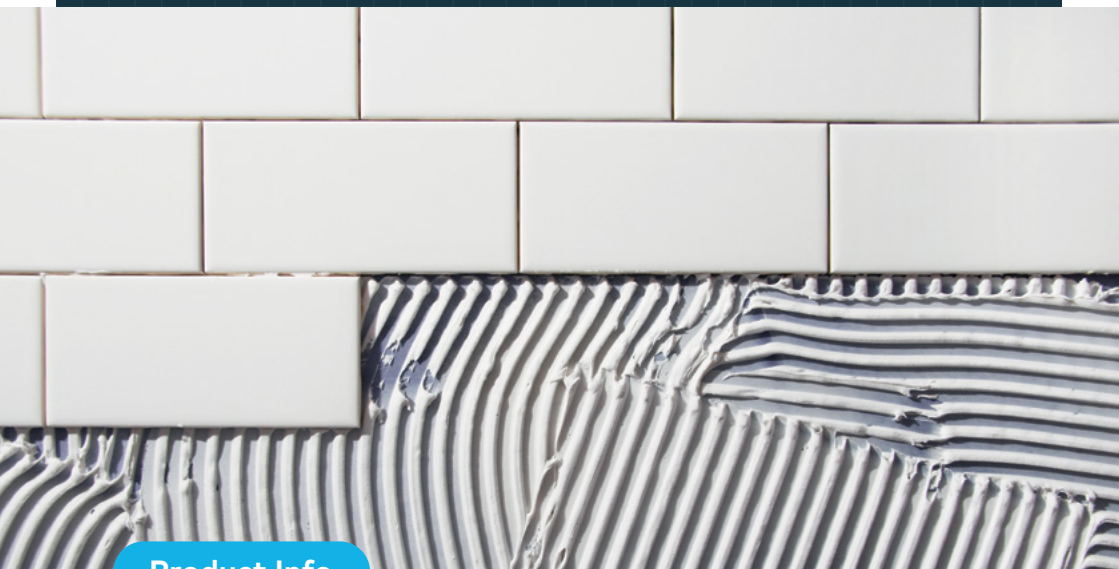

Product Info

Thickness	Size (mm)	Pallet sizes	Weight (kg)
6mm	1200 x 800	200	4.5kg
12mm	1200 x 800	100	9kg

IPP Ltd. Bradwell Hall,
Bradwell on Sea, Essex
CM0 7HX

Telephone
01621 776252

Email
sales@intpetro.com

If you have any technical queries,
please give us a call on 01621 776252.

building products
ipp